

सिंधुदुर्ग जिल्हा मध्यवर्ती सह. बँक लि.सिंधुदुर्ग
प्रधान कार्यालय सिंधुदुर्गनगरी
जाहीर निविदा

या बँकेच्या वैभववाडी शाखा कार्यालयाच्या पहिल्या मजल्यावरील जागेमधील हॉलचे नुतनिकरण व बांधकाम करून घ्यावयाचे आहे .

संदर्भित दरपत्रकातील अटी व शर्तीस अधिन राहून या बँकेच्या वैभववाडी शाखा कार्यालयाच्या पहिल्या मजल्यावरील हॉलचे नुतनिकरण व बांधकाम करून देणेसंदर्भात दि.१२/११/२०२५ रोजी दुपारी २.०० वाजेपर्यंत मोहरबंद निविदा मागविणेत येत आहेत.

अटी व शर्तीसह निविदा फॉर्म या बँकेच्या प्रधान कार्यालय प्रशासन विभागाकडे कार्यालयीन वेळेत तसेच या बँकेच्या www.sindhudurgdcc.com या वेब साईडवर उपलब्ध असून निविदा शुल्क रु.५००/- मात्र राहिल.



सही/-

मुख्य कार्यकारी अधिकारी
सिंधुदुर्ग जिल्हा मध्यवर्ती सहकारी बँक लि., सिंधुदुर्ग
प्रधान कार्यालय, सिंधुदुर्गनगरी

फोन ०२३६२ - २२९००५ ते २२९०१०, फॅक्स ०२३६२ - २२९००४

Email Add : admin@sindhudurgdcc.com

स्थळ : सिंधुदुर्गनगरी

दि. : २९/१०/२०२५

THE SINDHUDURG DISTRICT CENTRAL CO-OP BANK LTD SINDHUDURG
HEAD OFFICE SINDHUDURG NAGAR
Estimate for work
For SDCC Bank, At Vaibhavwadi
Construction and Interior work for Multipurpose Hall at Vaibhavwadi
Abstract Sheets



Sr.No.	Description of Item	Quantity	Unit	Rate	Amount
Civil work					
1	Cleaning & dismantling old structure & carrying out debris away from site	Lump sum			
2	Dismantling and refitting of fabricated roof structure	232.70	Sqm.		
3	Providing laterite stone masonry in cement mortar 1:6 in superstructure including racking out joints where plastering is to be done watering and scaffolding complete. (Laterite stone six sides cut and thickness of mortar joints shall be 12mm max.)	56.64	Cum.		
4	Providing and laying Cast in situ/Ready Mix cement concrete M-20 of trap/ granite / quartzite/ gneiss metal for R.C.C. slab with waterproofing complete.	5.67	Sqm.		
5	Providing and laying Cast in situ/Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including centering, formwork, cover blocks, laying/pumping, compaction and roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel). with fully automatic micro processor based PLC with SCADA enabled reversible Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With natural sand/V.S.I. quality Artificial Sand	9.30	Cum.		
6	Providing & fixing in position Mild Steel and HYSD bar reinforcement (TMT-Fe-500) of various diameters for R.C.C. footings, foundations, slabs, beams, columns, staircase, chajjas, lintels, parrdis, fins, copings, raft beams/slabs as per detailed designs, with necessary supporting as required etc. drawings and schedules including cutting, bending, hooking the bars, binding with	2.10	M.T.		
7	Providing Sand Faced Internal Cement Plaster 20mm thick in two coats in Cement Mortar 1:4 without Neeru finish to concrete, scaffolding and curing complete.	490.16	Sqm.		
8	Providing Sand Faced External Cement Plaster 25mm thick in two coats in Cement Mortar 1:4 without Neeru finish to concrete, brick surface in all positions including scaffolding and curing complete.	253.68	Sqm.		
9	Providing and laying vitrified mirror / glossy finish tiles decorative type having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group B1a) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete.	183.64	Sqm.		

**THE SINDHUDURG DISTRICT CENTRAL CO-OP BANK LTD SINDHUDURG
HEAD OFFICE SINDHUDURGNAGAR!**

Estimate for work

For SDCC Bank, At Vaibhavwadi

Construction and Interior work for Multipurpose Hall at Vaibhavwadi

Abstract Sheets



Sr.No.	Description of Item	Quantity	Unit	Rate	Amount
10	Providing and laying ceramic tiles of having size 30 cm x 30 cm confirming to I.S.15622/2006 (group D II-A) and 7 to 8 mm thick for flooring in required position laid on a bed of 1:4 cement mortar including cement float, filling joint with white/colour cement slurry cleaning curing etc. complete.	3.28	Sqm.		
11	Providing and laying ceramic tiles having size 30 cm. x 45 cm. confirming to corresponding I.S. for dado and skirting in required position with readymade adhesive mortar of approved quality on plaster of 1:2 cement mortar including joint filling with white/ colour cement slurry cleaning curing etc. complete.	20.82	Sqm.		
12	Providing and fixing mild steel grill work for windows, ventilators etc. 20 Kilogram/ One Square Metre as per drawing including fixtures, necessary welding and painting with one coats of anti-corrosive paint and two coats of oil painting complete.	29.07	Sqm.		
13	Providing and laying telephone black / Amba White / Cadburybrown / Ruby red / Ocean Brown granite stone of 18 to 20 mm thick for door frame/ dado/ window boxing etc. On C.M. 1:6 including filling joints with polymer base filler nosing/moulding the sharp edges wherever necessary, curing, etc. complete.	10.32	Sqm.		
14	Providing & fixing in position Colour Anodised Aluminium Sliding / Fixed windows of any size and shape as per detailed drawings and designs 5mm thk. clear float glass etc. and M. S. Grill with two coats of Synthetic Enamel painting.	27.45	Sqm.		
15	Providing and fixing in position powder coated aluminium louvered windows / ventilator of various sizes with powder coating as per detailed drawing and specifications including aluminium frames 80 x 38 mm x 1.22 mm box type, 5 mm thick sheet glass louvers, of approved quality etc. complete.	0.36	Sqm.		
16	Providing and fixing in position Gypsum board false ceiling with 12.5 mm thick Gypsum boards, screwed/ fixed to the under structure of suspended G.I. Grid constructed and suspended from the main ceiling consisting of ceiling sections of size 25 x 50 mm maximum center to center distance of 600 milimetre perimeter channel and intermediate channels at maximum center to center distance 1200 milimetre galvanized grid should be fixed to reinforced cement concrete slab. The gypsum board should be fixed to galvanized iron grid with necessary screws. The boards should be taped and filled from underside to give smooth, seamless ceiling. The rate should include necessary additional ceiling sections and intermediate channels. Additional intermediate channels should be fixed to strap hangers for additional support to prevent strapping at every 1200 milimetre item to be completed in all respect including necessary sleeves for ducts finishing of joints cut outs,	183.64	Sqm.		

THE SINDHUDURG DISTRICT CENTRAL CO-OP BANK LTD SINDHUDURG
HEAD OFFICE SINDHUDURG NAGARI

Estimate for work

For SDCC Bank, At Vaibhavwadi

Construction and Interior work for Multipurpose Hall at Vaibhavwadi

Abstract Sheets



Sr.No.	Description of Item	Quantity	Unit	Rate	Amount
17	Providing and applying Two coats of wall care Putty on plastered surface and Ceiling and Walls to prepare surface even and smooth of approved make, and applying pearl/ luster finish paint of approved colour and shade to the existing plaster surface including scaffolding, preparing the surface, applying the acrylic wall putti with 2 coat paint of asian paint etc. complete.	673.80	Sqm.		
18	Providing and applying two coats of exterior weather shield paint and damp proof of approved manufacture and of approved colour to the plastered surfaces including cleaning, preparing the plaster surface, applying primer coat, scaffolding if necessary, and watering the surface for two days etc complete.	253.68	Sqm.		
19	Providing and fixing in position, Double shuttered aluminium extruded powder coated openable door of specified size with aluminium door frame of powder coated with door clouser	1.00	nos		
20	Providing and fixing in position, Single shuttered aluminium extruded powder coated openable door of overall size 0.90 m x 2.40 m with aluminium door frame of powder coated with door clouser	1.00	nos		
21	Providing and fixing 30mm thick solid panel pvc internal door shutter with door clouser (750x2100)	1.00	Sqm.		
22	Providing and fixing 900mm high S.S. 304 Grade Stainless steel railing with 40mm diameter and 1.5mm thick at top, 40mm diameter and 1.5mm thick vertical supports spaced at 1.5m center to center and 8mm thick toughened glass including fabricating, fixtures, erecting, necessary welding, grinding, finishing, buffing to stainless steel pipe etc. complete	11.66	nos		
23	Bathroom Plumbing Making new plumbing fitting with hot water and cold water pipe fitting (Cpvc pipe & Apvc pipe to be used.) Water connection pipe for old ground floor bathroom.				
	Jaguar make CP fitting to be used. (diverter, shower, facet, angle cock, bottle trap, traps) = 1 nos each	1	no.each		
	Jaguar make sanitary ware to be used (wall hung comode, wash basin, urinal) = 1 nos each	1	no.each		
	Gyser connection).	1	nos		
	2000 litre water tank with fresh water supply piping from source	1	nos		
	Drainage piping in swp with inspection chamber were required.	2	nos		

**THE SINDHUDURG DISTRICT CENTRAL CO-OP BANK LTD SINDHUDURG
HEAD OFFICE SINDHUDURG NAGARI**

Estimate for work

For SDCC Bank, At Vaibhavwadi

Construction and Interior work for Multipurpose Hall at Vaibhavwadi

Abstract Sheets


Sr.No.	Description of Item	Quantity	Unit	Rate	Amount
24	Electric Fitting work				
	Connection from main metre to first floor.	1	nos		
	All wiring of polycab make.	175	points		
	4 sq.mm wire to be used for AC wiring. Total ac connection	9	points		
	Separate MCB for AC, light, fans etc.as per require	10	nos		
	All fans to be used of atomberg/Havells/Crompton make	10	nos		
	Exhaust fan for pantry and bathroom	2	nos		
	All lights to be 2 x 2 pannels of philips/Havells,etc makes	30	nos		
	Staircase lighting to be done.	5	points		
	Projector connection and porjector wiring (upto 10mtr	1	nos		
	wifi connection and wiring	1	nos		
				Total	

NOTE :

- 1) All the rates should be as per the MARKET RATE
- 2) This is an approximate Estimate and can be changed or Modified asper the Design Development by architect and the Owner.
- 3) Tentative Dimention are taken into consideration which may change at Design developmnet as on site by Architect or the Owner.
- 4) Any other material to be used for contrucation not in estimate would be serutinized by SDCC Bank, contractor and architect. After which rate would be finalised
- 5) This cost Estimate in retained by SDCC BANK LTD SINDHUDURG whose consent must be sought Before any use or Reproduction of this estimate or any part there of can be made.
- 6) Any discrepancy in the Estimate are to be brought to Notice to SDCC BANK LTD SINDHUDURG.
- 7) All right reserved by SDCC BANK LTD SINDHUDURG



DPs
Gen.Manager (Admin)

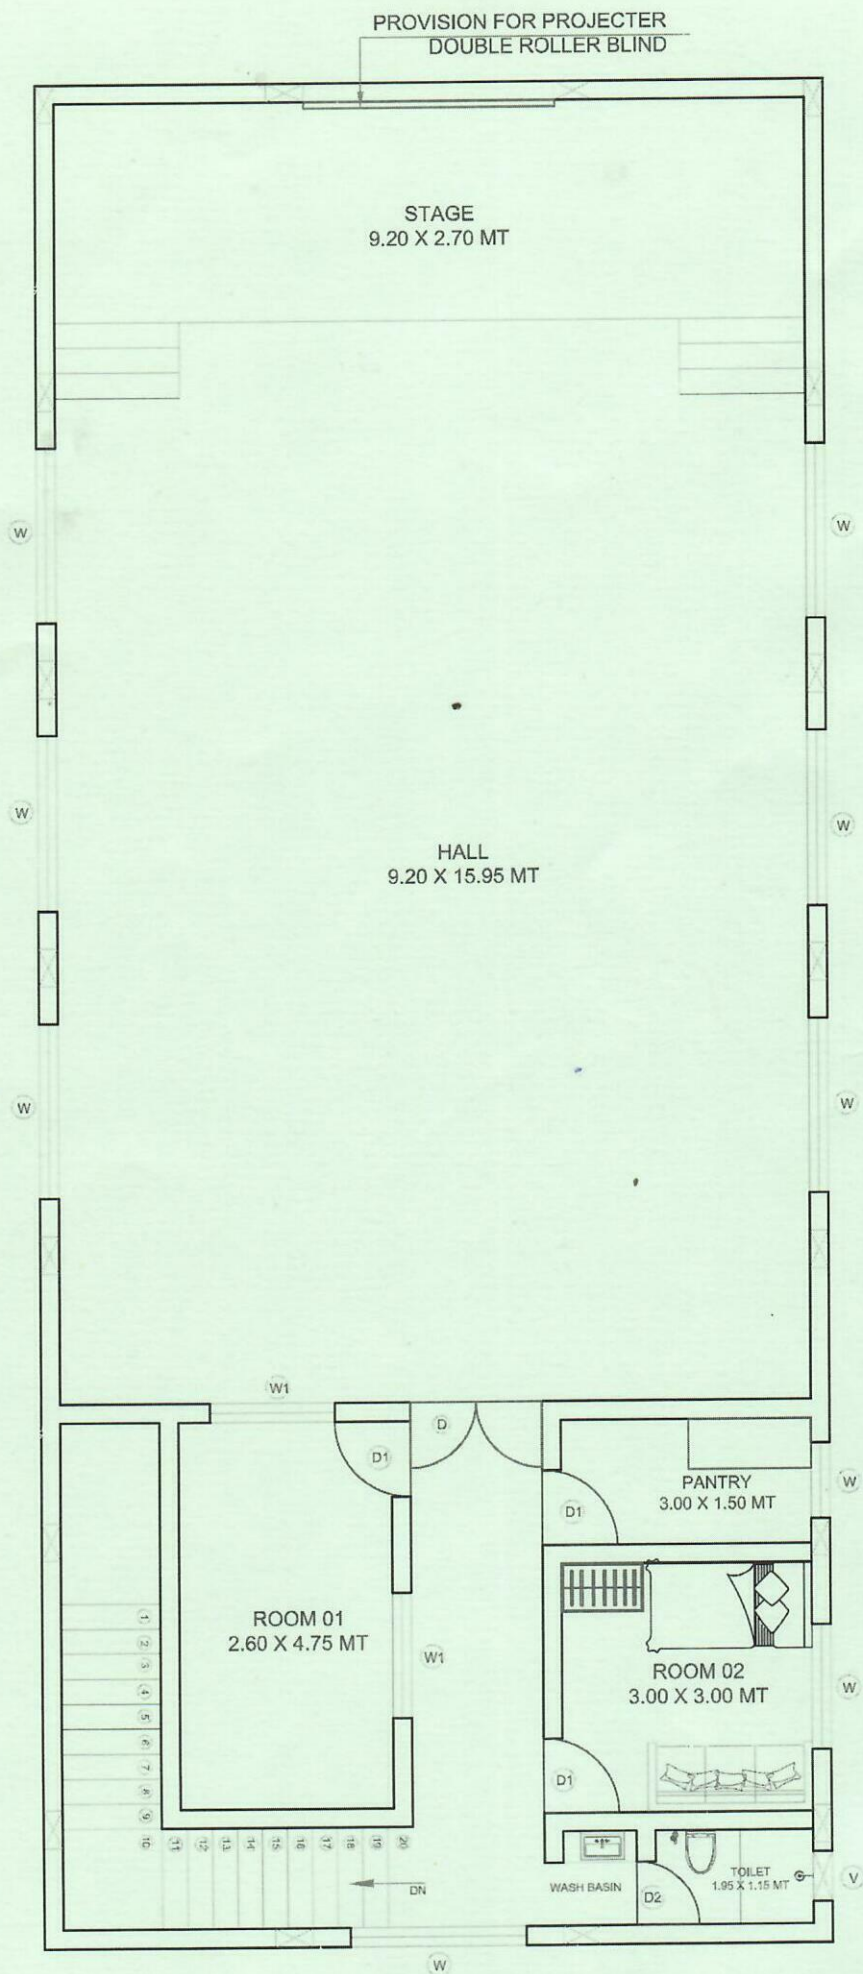

FIRST FLOOR